

CP series

REVCO

HYDRAULIC

Hand Pallet Truck

CAPACITY:

- 1500 KG (3300 Lbs.)
- 2500 KG (5500 Lbs.)
- 2000 KG (4500 Lbs.)
- 3000 KG (6600 Lbs.)

**WE PROVIDE WITH VARIOUS KINDS OF
DIFFERENT CAPACITY AND SCALE**

UN-NECESSARY MAINTENANCE

- Oil-less metals inserted
- The frame made of H.S. plates
- Strong and easy handle
- Coated and colored by melamin resin
- Light weight and strong wheels
- Neutral lever controllable at a touch



PT. RODA ROLLEN INDONESIA

KOMP. PERTOKOAN GLODOK JAYA 30, JL. HAYAM WURUK JAKARTA 11180 - INDONESIA

PHONE : (62) (21) 659-9225 - 26 - 27 - 28, 659-8725 - 26

FAX : (62) (21) 659-9261, 380-5959 ; MAIL ADD : P.O. BOX 2114 Jakarta 10001 - INDONESIA

E - MAIL : rrolleni@cabi.net.id



CP
series

HYDRAULIC Hand Pallet Truck

COMPACT BUT POWERFUL UNIT!




- **HANDLE AUTOMATICALLY RETURNS TO ORIGINAL VERTICAL POSITION**
 - Space saving
 - Shape handle operatable from both sides of truck
- **STRONG FRAME**
 - Light weight but strong frame
 - Steel wheel tyred by urethane, stereo-rubber
- **VALVE CLEANING SYSTEM**
 - Valve in general require disassembling and cleaning from time to time in order to keep up proper function of pump, but the REVCO valve eliminates troubles automatically from disassembling
- **LIGHT WEIGHT AND LONG LIFE WHEELS**

- **NEUTRAL LEVER CONTROLLABLE AT A TOUCH**
- **OIL-LESS METAL INSERTED**
 - Replacement of these metal (bushing) restores linkages to new condotion
- **COATED AND COLORED BY MELAMIN RESIN**
- **UNIQUE SPECIAL OIL PRESSURE PUMP**
 - Valve for pressure ajustment according to cargo weight

WHEEL OPTION :
RUBBER / URETHANE /
NYLON / CAST IRON

WHEEL OPTION :
URETHANE / NYLON /
CAST IRON

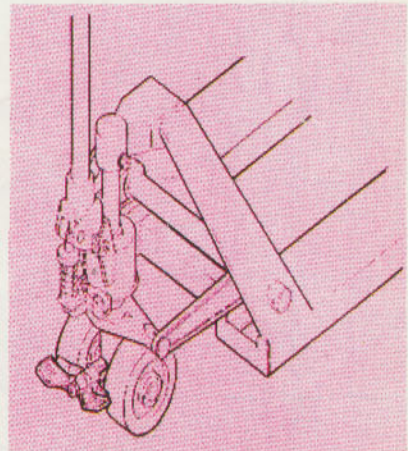

Parking Brake (Option)

SPECIFICATIONS

Standard Colour 10R 5.5 / 14.5

These specifications are subject to change without notice

Models	Capacity (Kgs)	Frame (mm)						Wheels (mm)		Net Weight (Kgs)
		W ₁	W ₂	L ₁	L ₂	H ₂	H ₁	(A)	(B)	
CP-15M-85	1500	470	150	850	380	80	200	180x70	80x73	64
CP-15M-115	1500	470	150	1150	380	80	200	180x70	80x73	70
CP-15S-107	1500	520	150	1070	380	80	200	180x70	80x73	70
CP-15S-115	1500	520	150	1150	380	80	200	180x70	80x73	71
CP-15L-107	1500	685	150	1070	380	80	200	180x70	80x73	81
CP-15L-115	1500	685	150	1150	380	80	200	180x70	80x73	83
CP-15L-122	1500	685	150	1220	380	80	200	180x70	80x73	84
CP-20S-107	2000	520	150	1070	380	80	200	180x70	80x73	78
CP-20S-115	2000	520	150	1150	380	80	200	180x70	80x73	80
CP-20L-107	2000	685	150	1070	380	80	200	180x70	80x73	84
CP-20L-115	2000	685	150	1150	380	80	200	180x70	80x73	86
CP-20L-122	2000	685	150	1220	380	80	200	180x70	80x73	87
CP-25S-107	2500	520	150	1070	380	80	200	180x70	80x73	84
CP-25L-122	2500	685	150	1220	380	80	200	180x70	80x73	98
CP-30S-107	3000	520	170	1070	390	80	200	180x70	80x73	112
CP-30L-122	3000	685	170	1220	390	80	200	180x70	80x73 (Tandem)	126
CP-30S-105	3000	550	170	1050	390	100	200	200x70	80x73 (Tandem)	113
CP-30L-125	3000	700	170	1250	390	100	200	200x70	80x73 (Tandem)	129

1) Low profile : Litting height 65 mm (without CP-25 & CP-30)

2) Tandem type : 70 x 56 mm x 4 pcs (without CP-30)

* Nylon Wheel A : Ø 175 x 60 mm; B : Ø 80 x 75 mm (without CP-30S-105 & CP-30L-

